

Press release

19 October 2011

New NC5 plus control version for injection moulding machines from Sumitomo (SHI) Demag

Great addition in convenience and functionality

Fakuma 2011 marks the start of sales of the new NC5 plus control version. With this version, Sumitomo (SHI) Demag Plastics Machinery GmbH, headquartered in Schwaig near Nuremberg, has made the layout of the NC5 control with its extensive range of functions even clearer, as well as creating and adding new functions. The enhanced visual guidance for the user opens the door to much more streamlined usage while providing as an extended range of functions.

The control plays a decisive role as the communication interface between an injection moulding machine and the user: only the control allows for access to the full range of performance of the machine, and therefore all the ways in which it can help maximise production efficiency. As a part of this, the user has to have layouts which are clear and easy to understand despite the comprehensive range of functions provided. With the NC5 plus, Sumitomo (SHI) Demag has been able to implement these requirements even better, as Dr. Frank Balbach, Director of Control Development at Sumitomo (SHI) Demag, emphasises: "The name says it all: NC5 plus is not a new control, compared with the tried and trusted previous NC5 version. We have, however, considerably enhanced the visual guidelines

for users to follow. Intuitive understanding has been placed even more strongly at the forefront. At the same time, we were able to implement a series of new functions. The result is a uniquely intuitive, as well as coherent and consistent, control version, which enables the user to access the full range of performance of their machine without any hindrance. The amount of training required for the customer can also be reduced to a minimum with the NC5 plus." The new NC5 plus version is being launched at Fakuma 2011 and is also planned to provide an upgrade option for the existing NC5 controls.

Rapid selection of favourites optimises navigation

Like before, the border toolbars positioned around the actual touch screen display contain various function buttons, the soft and hot keys. What have been added are the "activeKeys", which users themselves can then define as favourites. In this way, the user can store up to five screens with which they work most frequently from the numerous operating screens on a quick access toolbar on the right hand side of the screen. Five freely definable icons are available for this purpose, which enables these frequently used functions to be called up.

Two-click approach ensures rapid navigation

Beyond this, in order to guarantee quick navigation to all screens, the experts in control development have consistently followed a two-click strategy: this means that the user can access every screen with a maximum of two clicks. A search function which is easy for the user to apply replaces previous special functions as calling up screen lists and then having to scroll through them until the desired screen has been found. This also

means that the user is no longer required to note the screen numbers. "The totally logical division into primary and secondary groups, as well as the high level of consistency from the highest to the lowest level, simplify operations and create considerably quicker runs from the user's point of view", says Bernd Tröger, Director of Marketing.

Soft key layout completely revised

The soft key layout has also undergone a facelift in this regard and has been improved even further. Like before, the soft keys located at the bottom of the screen guide the user through the stages of adjusting the machine. In the new NC5 plus version, however, the user receives an increased amount of support in this process. Bundled access is possible to all screens linked to a primary group. For example, if the "process optimisation" soft key is selected, then all the screens logically linked to this primary group likewise expand as a soft key within a complete function group. In addition to the parameters which are displayed on the primary screen at a glance, such as speed, position, pressure, time and mould internal pressure, the functions linked to this automatically open, such as injection unit dynamics, machine adjustment values, intruding, shut-off nozzles etc., which can then be used to fine-tune adjustments.

This principle is just as advantageous and convenient when entering the mould setting. In this case, speed, position and force have to be entered for the closing and opening movements and locking and unlocking positions must also be defined in addition. All the components required for setting up the mould, such as ejectors, cores, pneumatic valves, mould protection

etc., appear in the soft key toolbar and can be called up directly.

Simplified data exchange

The new NC5 plus control version also offers the customer more convenience in the area of data exchange. The process, alarm and machine data can all be exported from every screen, i.e. printed, saved internally or onto a USB stick, without having to change the screen being displayed.

Display of the actual pressure curve in the injection profile makes adjustments easier

A new feature of the NC5 plus version is also that the course of the current injection pressure determined by the route being followed is overlaid as a curve in the screen displaying the injection profile. This allows the profile of the injection pressure limitation to be adjusted precisely to match a reference cycle. In addition, the cutoff of injection pressure to hold optimization of the pressure is displayed in order to facilitate the transition from injection to hold pressure.

New functions with NC5 plus

The new version not only provides its users with more convenience, but also with, an expanded variety of functions depending on how the injection moulding machine is equipped. Among the new functions of the NC5 plus, for example, are activeAdjust and activeQ+, as well as activeEcon.

activeAdjust: Individual adjustment options

Using a slider, the operator can increase or – if required – decrease the dynamics of the mould movement further to suit the individual application, without external

help. At the same time, the activeAdjust function is not just restricted to mould movements; it can be used with any machine movement such as ejector movements as well as cutoff from injection pressure to hold pressure. This offers the opportunity of being able to adjust the injection moulding machine, which has been set ex factory to perform a wide range of applications, according to individual preferences and thus to match the product and the process as effectively as possible.

activeQ+: Mould protection when closing and opening

In contrast to the previous NC5 version, the active mould protection system has been developed further and has now been adapted for the mould opening sequence: the tried and tested activeQ function, which stops mould closure movement in the event of unusually increased processing force, is supplemented further by the new activeQ+ function ensuring controlled opening of the mould. This prevents the mould from being damaged in the event that parts are snagged during opening.

activeEcon: integrated energy measurement and monitoring of production costs

Individualised opportunities for optimising performance are also available to users in terms of energy efficiency. This is where the new activeEcon function comes into play: by using detailed measurements of energy consumption for heating and drives, targeted improvements can be made over all cycle phases. A special feature of Sumitomo (SHI) Demag solutions is that the programme automatically calculates the effects on production costs. The energy values recorded per shot can thus be projected to cover a production order

and factored into the unit costs or calculation for the order. Since the user can also enter the material costs and machine hourly rate in addition to electricity costs, current production costs can be monitored very easily.

activeRemote: NC5 plus as an integrated switching centre of the injection moulding cell with periphery

As with the previous NC5 version, external devices, which have a touch screen available, can also be incorporated very simply into the operating interface of the NC5 plus control by activeRemote. Devices which can be easily integrated include robots for part handling the moulding, production planning systems (PPS) or main computer systems, peripheral devices or systems for process regulation and quality assurance. The control interfaces of these peripheral devices and partner systems are integrated into the NC5 plus control via Virtual Network Computing (VNC) and can be operated there just as easily as on the control itself. Corresponding solutions were recently developed in conjunction with Wittmann Plastic Devices, Sepro Robotique, Wemo, T.I.G. Technical Information Systems, ONI Wärmetrafo, Kistler and Priamus System Technologies. Preparations are already being made for further systems to be implemented in collaboration with partner companies. This means that Sumitomo (SHI) Demag's customers are highly flexible in working together with further partner organisations on technology and systems.

Sumitomo (SHI) Demag Plastics Machinery GmbH

Sumitomo (SHI) Demag Plastics Machinery GmbH, Schwaig/Germany, is one of the world's largest manufacturers of injection moulding machines for the processing of plastics. The Japanese-German company

was formed in the spring of 2008 by merging the injection moulding activities of Sumitomo Heavy Industries (SHI) and those of Demag Plastics Group.

The global development and production network of Sumitomo Heavy Industries and Sumitomo (SHI) Demag consists of four plants in Japan, Germany and China with more than 3,000 employees. The product portfolio encompasses all-electric, hydraulic and hybrid injection moulding machines with clamping forces of between 180 and 20,000 kN. With almost 100,000 machines installed, Sumitomo (SHI) Demag is present in all important markets throughout the world.

With more than 4,200 machines sold each year, Sumitomo Heavy Industries counts as Japan's largest manufacturer of injection moulding machines. The main Sumitomo plant in Chiba produces machines with low and medium clamping forces. Around 95 % of all machines supplied by Sumitomo Heavy Industries have an all-electric drive.

The main Demag facility in Schwaig/Germany focuses on the hydraulic Systec and the hybrid high performance, high-speed EI-Exis machines. Recognising the increasing importance of electric drive technology for injection moulding machines, Sumitomo (SHI) Demag has expanded the former Demag factory in Wiehe/Germany into an international centre of competence for electric machines. Thanks to the new production capacities, Wiehe now supplies all electric injection moulding machines for the European and American market with its IntElect and SE series and also the hydraulic Systec series with clamping forces of up to 1,200 kN.

Sumitomo (SHI) Demag continues to operate the former Demag plant in Ningbo/China which has been active since 1999. Since 2007 the subsidiary located there, Demag Plastics Machinery (Ningbo) Co., Ltd, had its own, newly built plant and after reaching full capacity, moved to a larger factory with a production area of 11,000 sqm. Injection moulding machines from the Dragon and Systec C product lines with clamping forces of between 500 and 8,000 kN are produced here for Asian markets.

In addition to injection moulding machines, Sumitomo (SHI) Demag offers customised and standardised systems for the automated handling of moulded parts, technical solutions for special applications in process engineering, tailor-made service concepts and various forms of financing for investments in injection moulding machines.


With its seamless sales and service network of subsidiaries and representations, Sumitomo (SHI) Demag is present in all major industrial markets.

www.sumitomo-shi-demag.eu

Contact

Stefanie Lauterbach, Marketing
Sumitomo (SHI) Demag Plastics Machinery GmbH
Tel. +49 911 5061-2915
Fax +49 911 5061-750
E-mail: Stefanie.Lauterbach@dpg.com

<Favoriten_en.jpg>

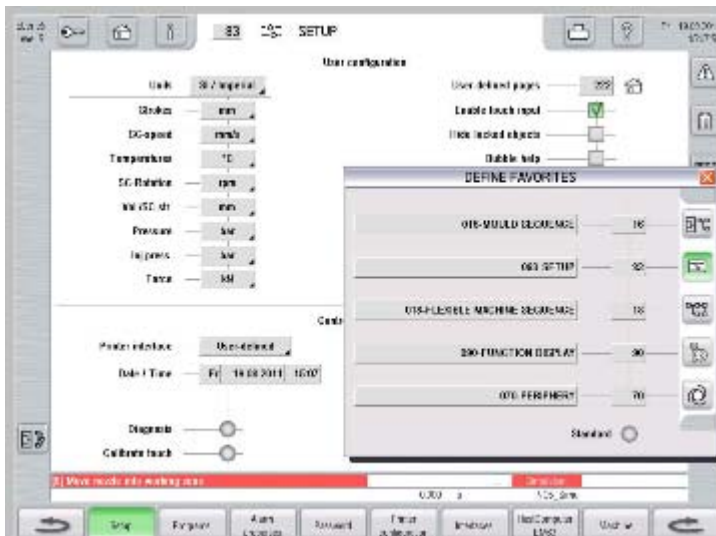

"activeKeys" enables rapid selection of frequently used functions, which users themselves can then define as favourites.

Photo: Sumitomo (SHI) Demag


<Bildverzeichnis_Gruppen_en.jpg>



By consistently dividing all functions into primary and secondary groups, each screen can be called up with a maximum of two clicks; this eliminates having to call up screen lists and then having to scroll through them.

Photo: Sumitomo (SHI) Demag

<Prozess_Funktionsgruppen_en.jpg>

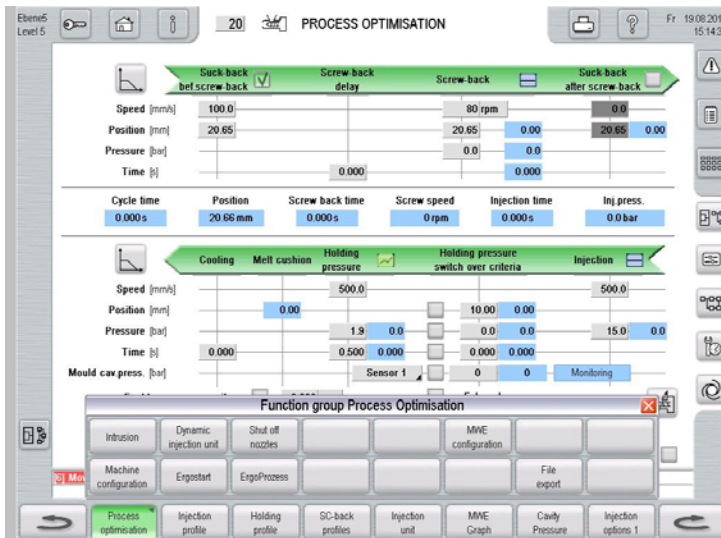

When calling up one of the soft keys located at the bottom of the screen,, bundled access is possible to all screens logically linked to this primary group. They likewise expand as soft keys within a complete function group.

Photo: Sumitomo (SHI) Demag


<activeAdjustWerkzeug_en.jpg>



New activeAdjust function: Using a slider, the operator can increase or – if required – decrease the dynamics of the mould movement to suit the individual application, without external help.

Photo: Sumitomo (SHI) Demag

<activeEcon_en>

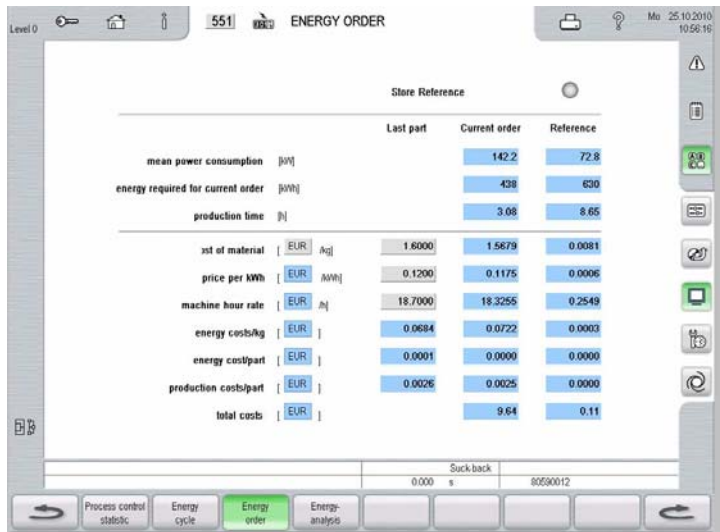

The screenshot shows a software interface titled "ENERGY ORDER" with a "Store Reference" section. It displays a comparison between "Last part" and "Current order" across various metrics. The "Current order" values are highlighted in blue. Below the comparison table, there is a section for "Sack-back" with values 0.000 and 80590012. At the bottom, there is a navigation bar with buttons for "Process control static", "Energy cycle", "Energy order" (highlighted in green), and "Energy-analysis".

		Last part	Current order	Reference
mean power consumption [kW]			142.2	72.8
energy required for current order [kWh]			438	630
production time [h]			3.06	8.65
cost of material [EUR]	kg	1.6000	1.5679	0.0081
price per kWh [EUR]	kWh	0.1200	0.1175	0.0006
machine hour rate [EUR]	h	18.7000	18.3255	0.2549
energy costs/kg [EUR]		0.0684	0.0722	0.0003
energy cost/part [EUR]		0.0001	0.0000	0.0000
production cost/part [EUR]		0.0026	0.0025	0.0000
total costs [EUR]			9.64	0.11

Sack-back
0.000 s 80590012

The new activeEcon function offers the user not only built-in energy measurement and analysis of energy consumption, but also direct monitoring of production costs by taking into account the costs of materials and electricity, as well as the machine hourly rate.

Photo: Sumitomo (SHI) Demag